



PX-0395-GRI

V0

Loyd One Emission Aplique



Descripción

Aplique IP54 Loyd One Emission LED 2.1W 3000K ON-OFF Gris 96lm

	Acabado	Material
Estructura	Gris	Aluminio
Difusor	Transparente	Cristal




IP54



Check Photometric file



20



CARACTERÍSTICAS TÉCNICAS

Fuente de luz

Fuente de luz: LED CREE
Potencia (W): 2.1W
Consumo total (W): 3.4
Temperatura de color: Blanco cálido - 3000K
CRI: 80
Riesgo fotobiológico: RG2
Lumens reales: 96
Nº Leds: 1
Lm/W reales: 28
Vida útil: 36.000h L70B30
Bin / Grup: 7C1/7B4
MacAdam steps: 3
UGR: 10
Bombilla recomendada: LED

EQUIPO

Marca: SINOBASE
Equipo incluido: Si, electrónico
Voltaje / Frecuencia:
100-240V/50-60Hz
Factor de potencia: 0.40
Protocolo de regulación: ON-OFF

Luminaria

Garantía: 5 Años

Logística

Eficiencia energética: LED A++
EAN: 8435381493882
Peso neto (Kg): 0.3
Peso en Kg (embalado): 0.35
Box: 85 x 70 x 85
Masterbox: 20

El acabado de la fotografía puede no coincidir con el de la referencia. Para identificar el real ver descripción del acabado.

Luminaire

Code PX-0395-GRI
Name Aplique led


Measurement

Code PX-0395-GRI
Name Aplique led

Luminaire Flux	96.36 lm	Luminaire Power	0.00 W	Efficacy	---	Efficiency	100.00%
Lamps Flux	96.36 lm	Maximum value	623.06 cd/klm	Position	C=270.00 G=175.00	CG	Asymmetrical
Rectangular Luminaire		Length	80 mm	Width	64 mm	Height	76 mm
Rectangular Luminous Area		Length	28 mm	Width	38 mm	Height	0 mm
Horizontal Luminous Area		0.001064 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000257 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		07-09-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		96.36 lm	
Operator		LEDS		Source Voltage [V]			
Temperature		25.00 °C		Source current [A]			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	PX-0395-GRI	PX-0395-GRI	96.36	0.00	1
C.I.E.	0 0 0 0 100	D DIN 5040	--		
F UTE	1.00 T	B NBN	BZ 10		

80mm x 64mm




C Halfplanes

180.0 — 0.0
270.0 — 90.0

ULOR100.00 %

DLOR 0.00 %

RN100.00 %

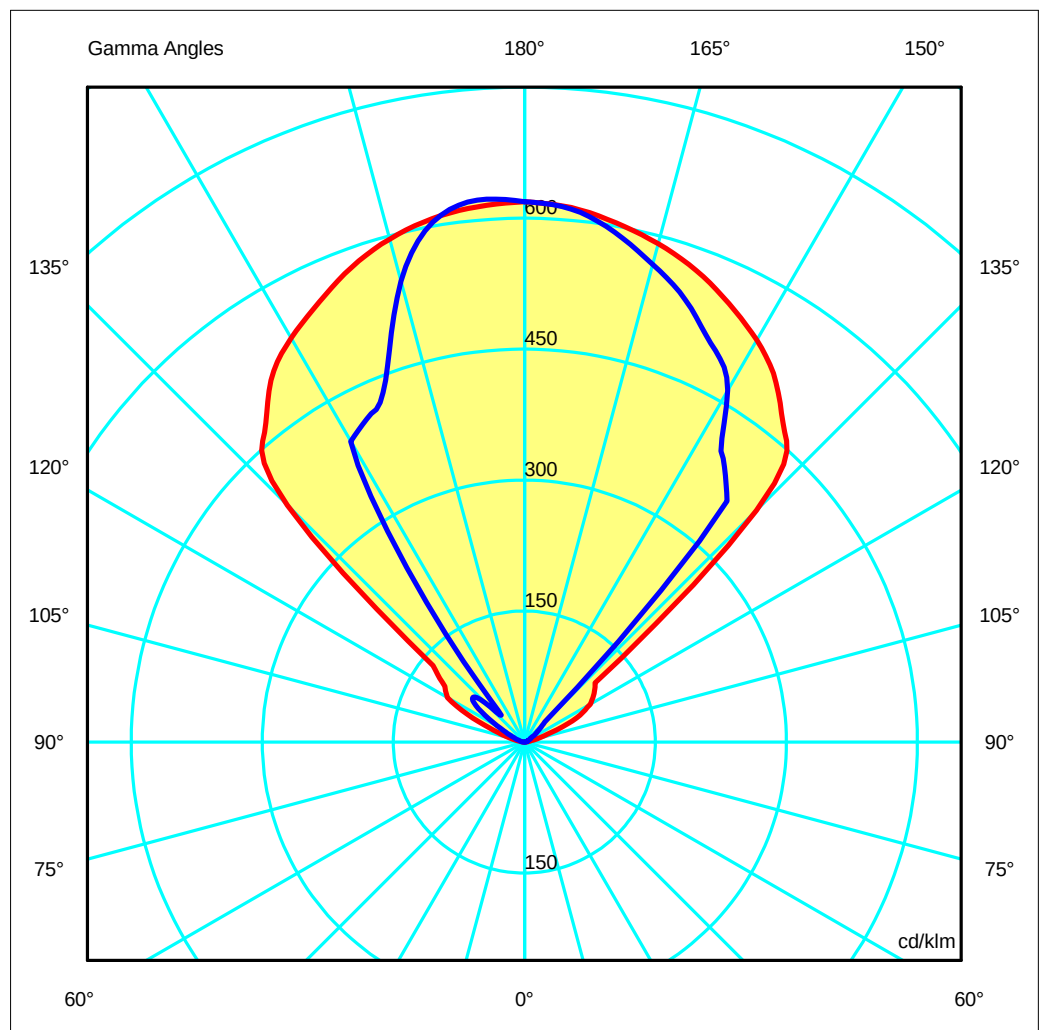

Luminaire
 Code PX-0395-GRI
 Name Applique led
Measur.
 Code PX-0395-GRI
 Name Applique led

Luminaire Flux	96.36 lm		Luminaire Power		0.00 W		Efficacy		---		Efficiency		100.00%	
Lamps Flux	96.36 lm		Maximum value		623.06 cd/klm		Position		C=270.00 G=175.00		CG Asymmetrical			
Luminous Intensity Table cd/klm Table 1/1														
	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00	C 105.00	C 120.00	C 135.00	C 150.00	C 165.00		
G 0.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 5.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 10.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 15.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 20.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 25.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 30.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 35.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 45.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 65.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 75.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 90.0	0.02	0.02	0.02	0.02	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.02	0.02
G 95.0	0.81	0.54	0.38	0.26	0.21	0.19	0.21	0.22	0.23	0.26	0.40	0.45	0.45	0.45
G100.0	5.03	3.92	2.13	1.49	1.24	1.27	1.27	1.36	1.39	1.54	2.08	3.50	3.50	3.50
G105.0	15.10	13.41	5.28	3.07	2.48	2.35	2.27	2.41	2.62	3.20	4.94	12.21	12.21	12.21
G110.0	33.24	32.34	12.44	5.42	3.81	3.43	3.31	3.49	4.03	5.71	10.85	31.31	31.31	31.31
G115.0	66.08	63.46	32.72	8.74	5.89	5.28	4.98	5.35	6.16	9.37	26.02	66.47	66.47	66.47
G120.0	86.80	89.99	59.52	14.23	8.87	7.93	8.02	8.11	9.44	15.46	57.51	94.88	94.88	94.88
G125.0	97.49	88.46	63.13	35.74	15.06	12.74	13.63	12.71	15.08	29.52	72.18	97.16	97.16	97.16
G130.0	105.61	143.86	311.12	295.95	25.34	20.21	20.66	20.38	25.22	273.00	314.36	213.04	213.04	213.04
G135.0	375.35	382.19	386.51	352.38	325.91	99.91	32.77	74.05	294.14	287.99	390.49	380.65	380.65	380.65
G140.0	463.31	457.84	438.79	417.17	372.75	363.95	360.45	363.64	369.94	418.13	443.67	457.34	457.34	457.34
G145.0	502.32	497.73	482.07	461.32	440.25	411.03	396.74	410.39	439.02	462.17	479.52	499.82	499.82	499.82
G150.0	531.65	526.60	515.07	500.15	485.89	475.70	465.21	473.36	481.98	501.18	516.69	531.25	531.25	531.25
G155.0	554.13	551.67	542.90	532.39	519.82	510.82	504.33	509.33	520.58	535.63	544.83	554.62	554.62	554.62
G160.0	574.90	572.53	567.83	559.72	550.82	544.54	539.05	542.88	549.42	559.12	570.58	578.82	578.82	578.82
G165.0	591.03	589.86	585.60	580.19	575.61	571.36	566.60	567.45	572.54	581.21	590.00	595.59	595.59	595.59
G170.0	603.92	603.69	600.85	599.13	597.34	594.25	593.28	593.05	596.29	599.97	603.95	606.96	606.96	606.96
G175.0	614.57	612.01	612.01	611.63	612.22	612.10	612.86	611.04	611.78	612.98	615.05	615.40	615.40	615.40
G180.0	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85
	C 180.00	C 195.00	C 210.00	C 225.00	C 240.00	C 255.00	C 270.00	C 285.00	C 300.00	C 315.00	C 330.00	C 345.00		
G 0.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 5.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 10.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 15.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 20.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 25.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 30.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 35.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 45.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 65.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 75.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 90.0	0.02	0.02	0.02	0.03	0.07	0.04	0.05	0.05	0.08	0.05	0.04	0.03	0.03	0.03
G 95.0	0.80	0.73	0.69	0.68	0.67	0.67	0.58	0.53	0.43	0.53	0.57	0.84	0.84	0.84
G100.0	4.75	3.99	3.30	3.02	2.77	2.77	2.72	2.81	2.60	2.89	3.21	3.88	3.88	3.88
G105.0	15.05	11.40	7.39	6.37	5.67	5.91	5.73	5.83	5.53	6.03	7.20	10.12	10.12	10.12
G110.0	32.43	26.36	13.82	11.23	10.24	10.32	10.02	10.33	10.44	10.05	12.67	25.46	25.46	25.46
G115.0	65.30	57.91	22.00	18.68	20.00	17.68	17.28	18.10	20.23	16.47	19.61	55.63	55.63	55.63
G120.0	101.94	95.86	34.91	31.05	39.51	34.43	31.79	36.00	42.46	32.56	26.87	80.52	80.52	80.52
G125.0	111.45	102.79	52.75	38.32	61.44	62.50	60.03	65.22	64.24	38.62	38.46	79.85	79.85	79.85
G130.0	136.71	224.06	299.32	34.48	53.83	73.95	77.82	74.78	56.45	32.60	285.62	227.00	227.00	227.00
G135.0	383.88	400.68	333.49	196.28	42.85	58.05	63.89	58.29	45.26	116.42	324.42	385.40	385.40	385.40
G140.0	463.10	465.70	373.68	348.93	139.28	45.13	46.80	44.24	92.85	343.73	360.71	449.66	449.66	449.66
G145.0	505.91	507.78	418.77	379.03	374.12	306.15	195.20	284.94	373.74	375.28	403.61	498.55	498.55	498.55
G150.0	534.19	534.55	484.43	409.68	396.51	396.51	397.70	397.59	398.84	406.91	468.10	533.03	533.03	533.03
G155.0	556.17	561.61	542.52	463.40	429.96	419.68	415.21	420.61	430.11	456.20	534.46	563.45	563.45	563.45
G160.0	578.76	586.71	578.00	545.01	487.50	464.45	458.51	460.94	482.18	536.71	575.78	584.66	584.66	584.66
G165.0	596.56	602.52	602.25	591.47	571.28	554.61	546.50	553.89	569.23	591.00	601.36	599.04	599.04	599.04
G170.0	608.83	611.65	615.69	615.40	611.72	608.59	604.77	605.99	609.38	614.15	615.14	609.57	609.57	609.57
G175.0	615.61	616.05	619.17	621.16	622.37	622.62	623.06	622.42	622.59	620.79	618.68	616.34	616.34	616.34
G180.0	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85	618.85

Luminaire

Code PX-0395-GRI
Name Applique led


Measurem.

Code PX-0395-GRI
Name Applique led


Luminaire Flux	96.36 lm	Luminaire Power	0.00 W	Efficacy	---	Efficiency	100.00%
Lamps Flux	96.36 lm	Maximum value	623.06 cd/klm	Position	C=270.00 G=175.00	CG	Asymmetrical

80mm x 64mm

C Halfplanes



180.0 ——— 0.0
270.0 ——— 90.0

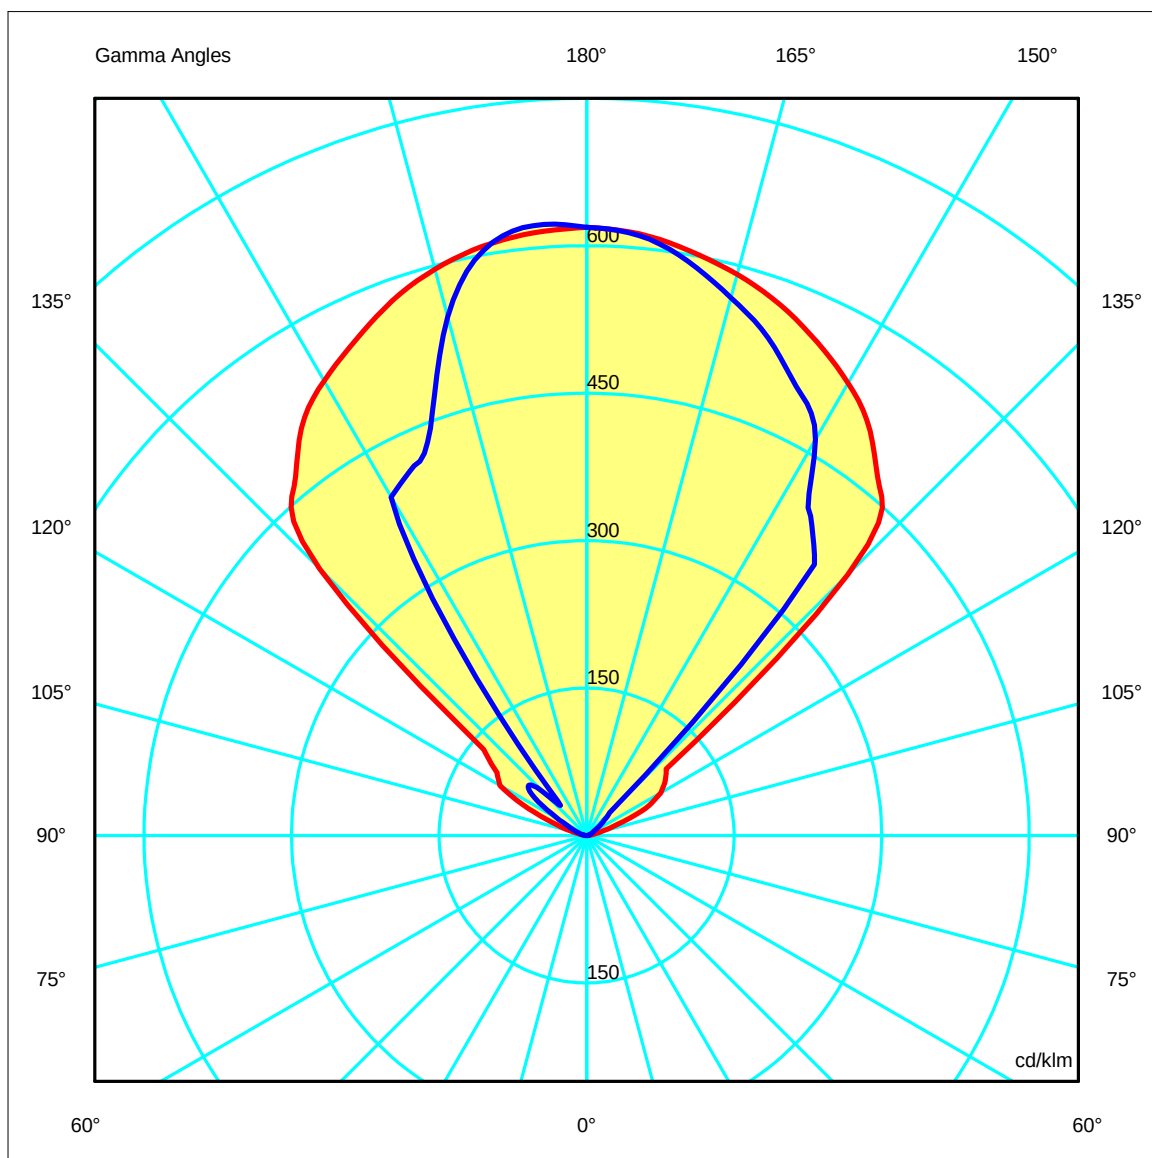


Luminaire
 Code PX-0395-GRI
 Name Applique led
Measurem.
 Code PX-0395-GRI
 Name Applique led

Luminaire Flux	96.36 lm	Luminaire Power	0.00 W	Efficacy	---	Efficiency	100.00%
Lamps Flux	96.36 lm	Maximum value	623.06 cd/klm	Position	C=270.00 G=175.00	CG	Asymmetrical


Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.04	2.09	3.13	4.18	5.22	OC	0.87	1.73	2.60	3.47	4.33
OB	1.05	2.11	3.16	4.22	5.27	OD	0.64	1.27	1.91	2.55	3.19

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	59.63	59.22	56.95	53.40	48.40	36.17	9.39	6.37	1.45	0.08
OB	59.63	59.32	57.48	53.59	48.75	36.99	10.74	6.29	1.45	0.08
OC	59.63	59.06	54.60	48.60	38.23	3.16	1.31	0.48	0.22	0.02
OD	59.63	60.04	52.66	40.01	18.81	6.16	5.78	1.67	0.55	0.06

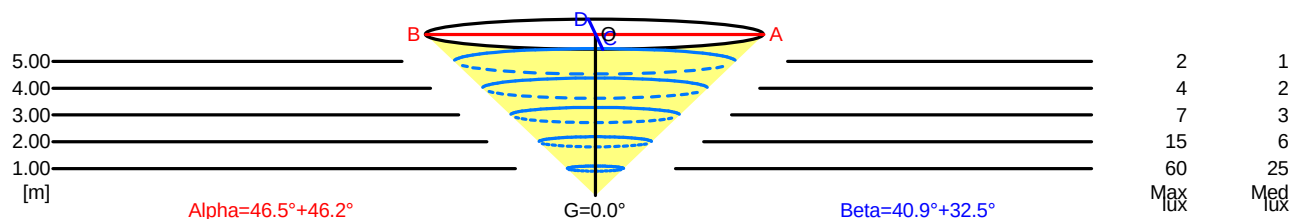

5.00	10.50	2	1			
4.00	8.40	4	2			
3.00	6.30	7	3			
2.00	4.20	15	6			
1.00	2.10	60	25			
H[m]	D[m]	Max lux	Med lux	Alpha=46.5°+46.2°	G=0.0	

5.00	7.52	2	1			
4.00	6.02	4	2			
3.00	4.51	7	3			
2.00	3.01	15	6			
1.00	1.50	60	25			
H[m]	D[m]	Max lux	Med lux	Beta=32.5°+40.9°	G=0.0	

Luminaire

Code PX-0395-GRI
Name Applique led

Measurement

Code PX-0395-GRI
Name Applique led

Luminaire Flux	96.36 lm	Luminaire Power	0.00 W	Efficacy	---	Efficiency	100.00%
Lamps Flux	96.36 lm	Maximum value	623.06 cd/klm	Position	C=270.00 G=175.00	CG Asymmetrical	

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=3H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=4H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=6H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=8H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=2H y=12H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=2H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=3H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=4H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=6H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=8H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=4H y=12H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=8H y=4H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=8H y=6H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=8H y=8H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=8H y=12H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=12H y=4H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=12H y=6H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0
x=12H y=8H	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0	< 0

Luminaire


Code PX-0395-GRI
Name Applique led

Measurem.

Code PX-0395-GRI
Name Applique led


Luminaire Flux	96.36 lm	Luminaire Power	0.00 W	Efficacy	---	Efficiency	100.00%
Lamps Flux	96.36 lm	Maximum value	623.06 cd/klm	Position	C=270.00 G=175.00	CG	Asymmetrical

80mm x 64mm



C Halfplanes

180.0 ————— 0.0
270.0 ————— 90.0

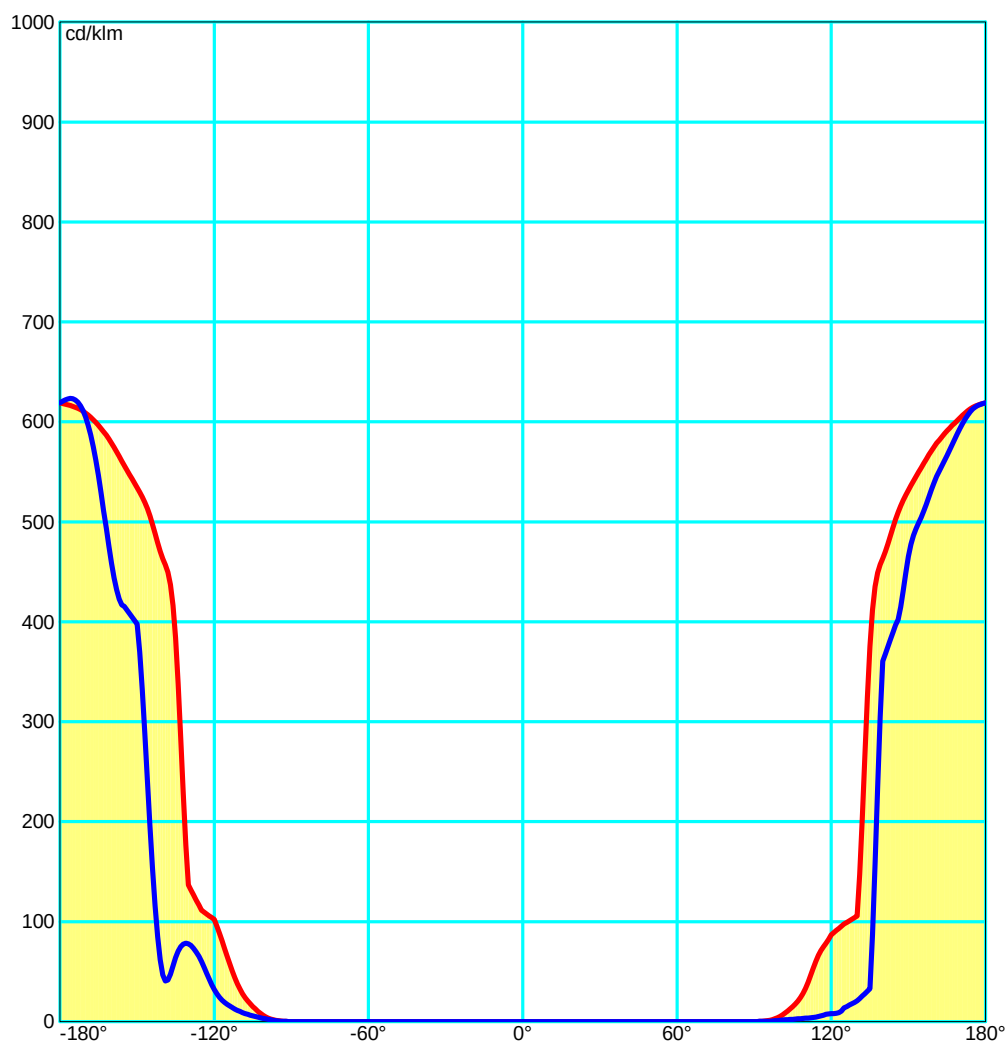

Luminaire

Code PX-0395-GRI

Name Applique led

Measurem.

Code PX-0395-GRI

Name Applique led

Luminaire Flux	96.36 lm	Luminaire Power				0.00 W		Efficacy		---		Efficiency		100.00%
Lamps Flux	96.36 lm	Maximum value				623.06 cd/klm		Position		C=270.00 G=175.00		CG Asymmetrical		
Luminance cd/m2 Table 1/3														
	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00	
G 0.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 5.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 10.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 15.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 20.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 25.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 30.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 35.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 45.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 65.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 75.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

Luminaire

Code PX-0395-GRI

Name Applique led

Measurement

Code PX-0395-GRI

Name Applique led

Luminaire Flux	96.36 lm	Luminaire Power	0.00 W	Efficacy	---	Efficiency	100.00%
Lamps Flux	96.36 lm	Maximum value	623.06 cd/klm	Position	C=270.00 G=175.00	CG	Asymmetrical

Luminance cd/m2 Table 2/3

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 5.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 10.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 15.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 20.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 25.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 30.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 35.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 45.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 65.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 75.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire

Code PX-0395-GRI
Name Applique led

Measurem.

Code PX-0395-GRI
Name Applique led

Luminaire Flux	96.36 lm	Luminaire Power	0.00 W	Efficacy	---	Efficiency	100.00%
Lamps Flux	96.36 lm	Maximum value	623.06 cd/klm	Position	C=270.00 G=175.00	CG	Asymmetrical

Luminance cd/m2 Table 3/3


	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 5.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 10.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 15.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 20.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 25.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 30.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 35.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 40.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 45.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 50.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 65.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 75.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 80.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 85.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
 Code PX-0395-GRI
 Name Applique led
Measur.
 Code PX-0395-GRI
 Name Applique led

Luminaire Flux	96.36 lm	Luminaire Power	0.00 W	Efficacy	---	Efficiency	100.00%
Lamps Flux	96.36 lm	Maximum value	623.06 cd/klm	Position	C=270.00 G=175.00	CG	Asymmetrical

PERCENTAGE ISOCANDLES

Projection: Equal Area Tilting Angle:0°

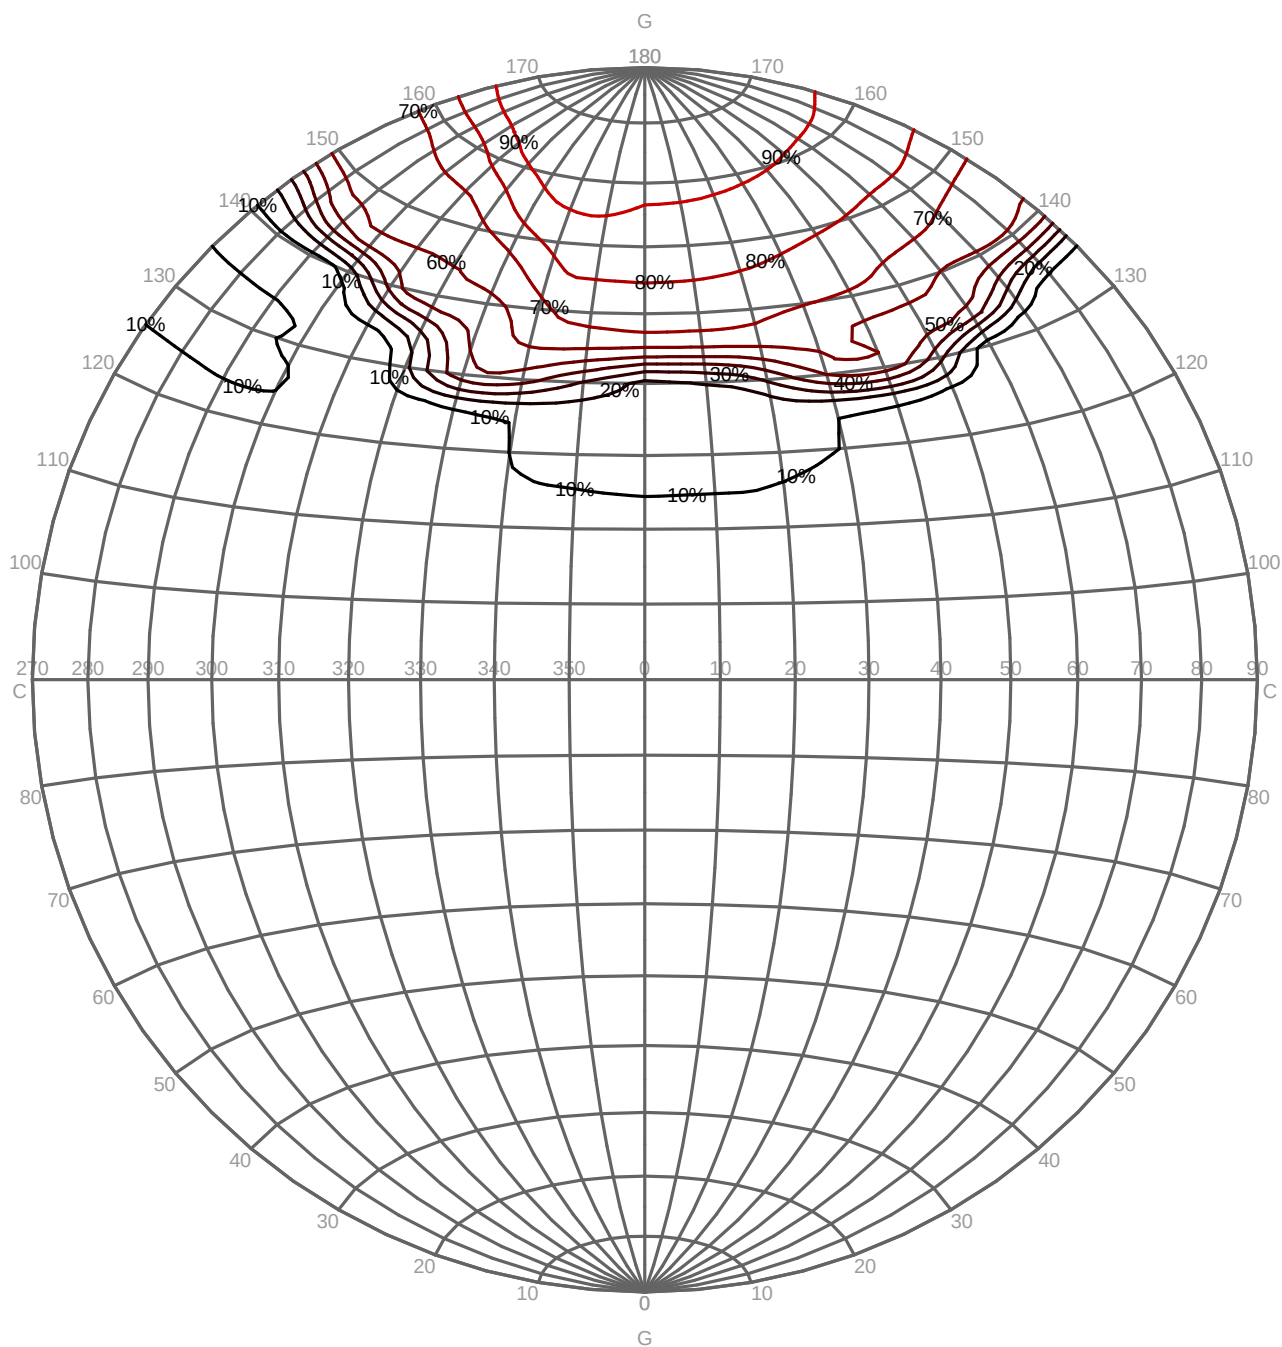

Luminaire

Code PX-0395-GRI
Name Applique led


Measurement

Code PX-0395-GRI
Name Applique led

Luminaire Flux	96.36 lm	Luminaire Power	0.00 W	Efficacy	---	Efficiency	100.00%
Lamps Flux	96.36 lm	Maximum value	623.06 cd/klm	Position	C=270.00 G=175.00	CG	Asymmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

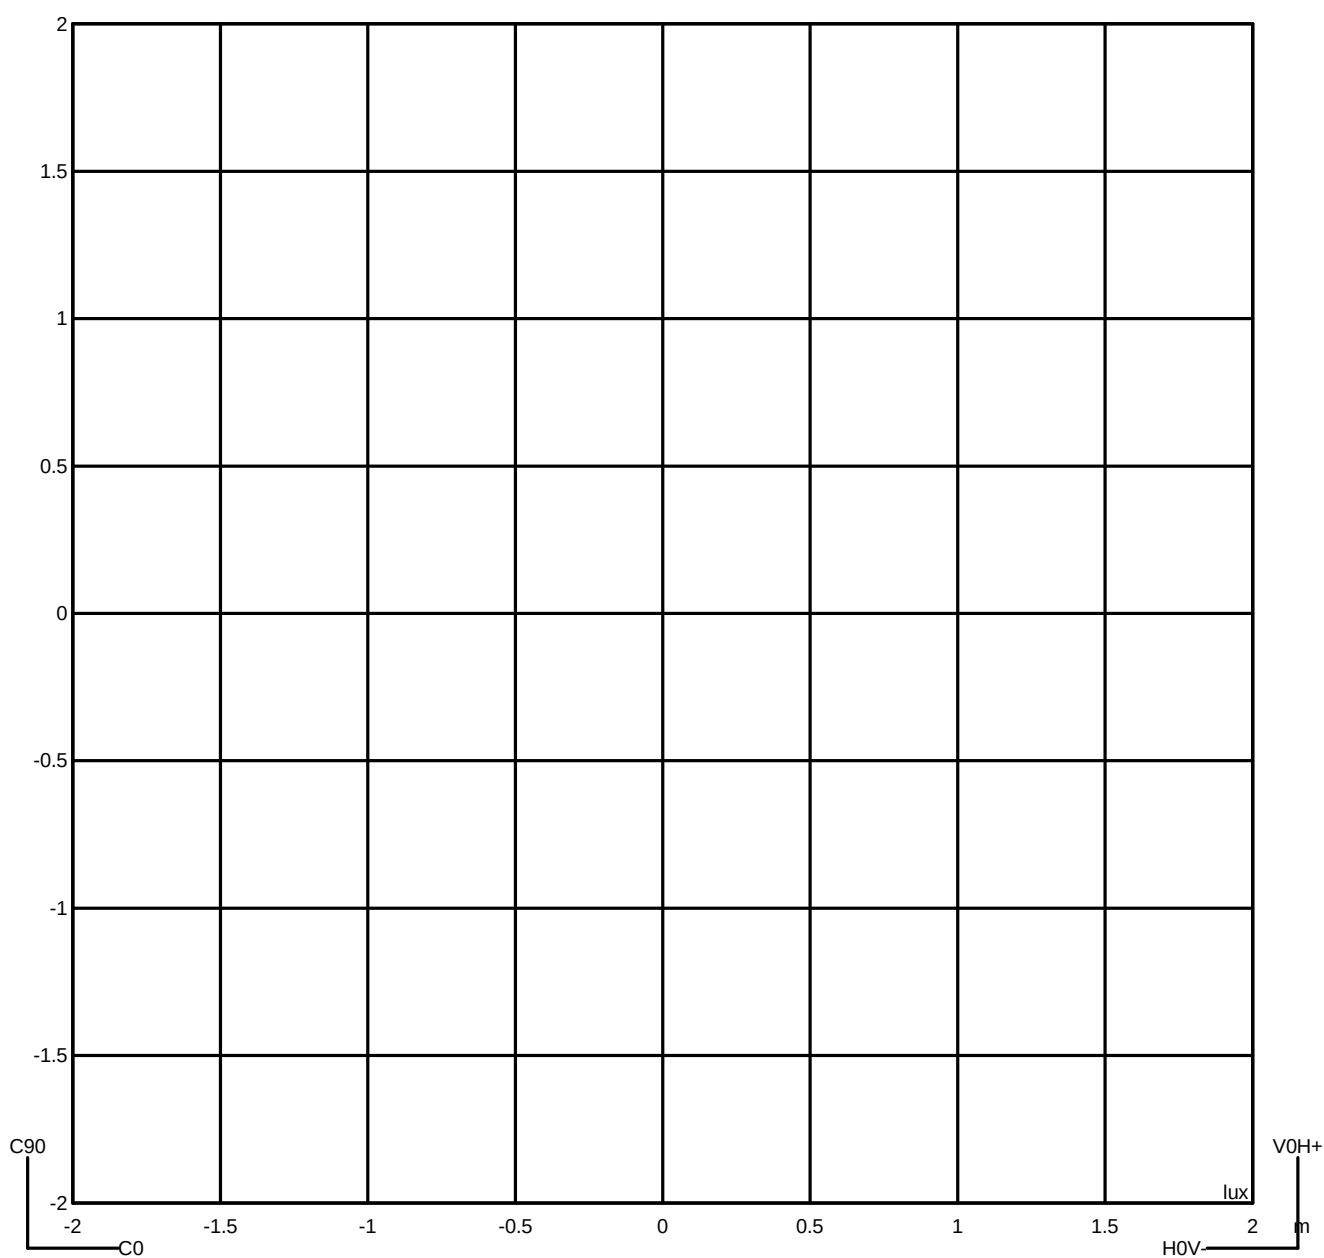

Luminaire

Code PX-0395-GRI
Name Applique led


Measur.

Code PX-0395-GRI
Name Applique led


Luminaire Flux	96.36 lm	Luminaire Power	0.00 W	Efficacy	---	Efficiency	100.00%
Lamps Flux	96.36 lm	Maximum value	623.06 cd/klm	Position	C=270.00 G=175.00	CG Asymmetrical	



Average Luminance [cd/m²]										
0.0°	45°	50°	55°	60°	65°	70°	75°	80°	85°	---
0	0	0	0	0	0	0	0	0	0	

Flush mounted or longitudinal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55


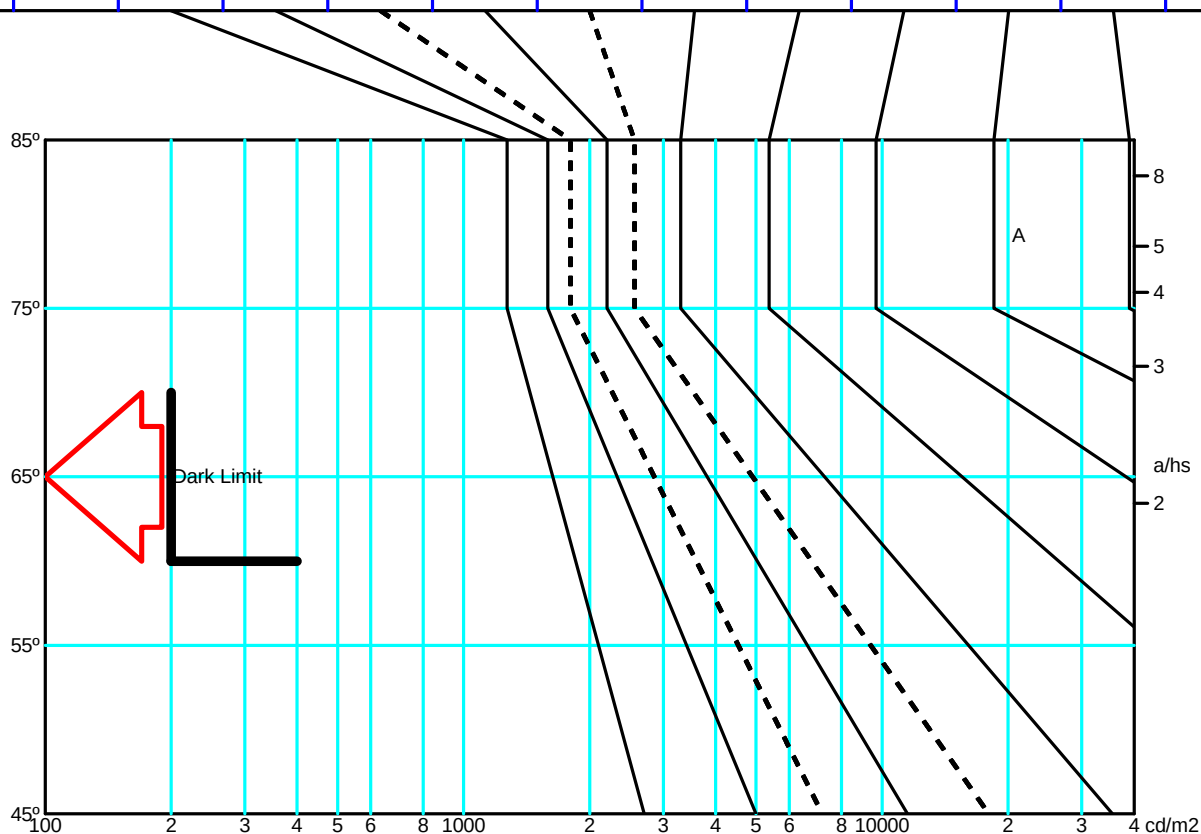


Transversal


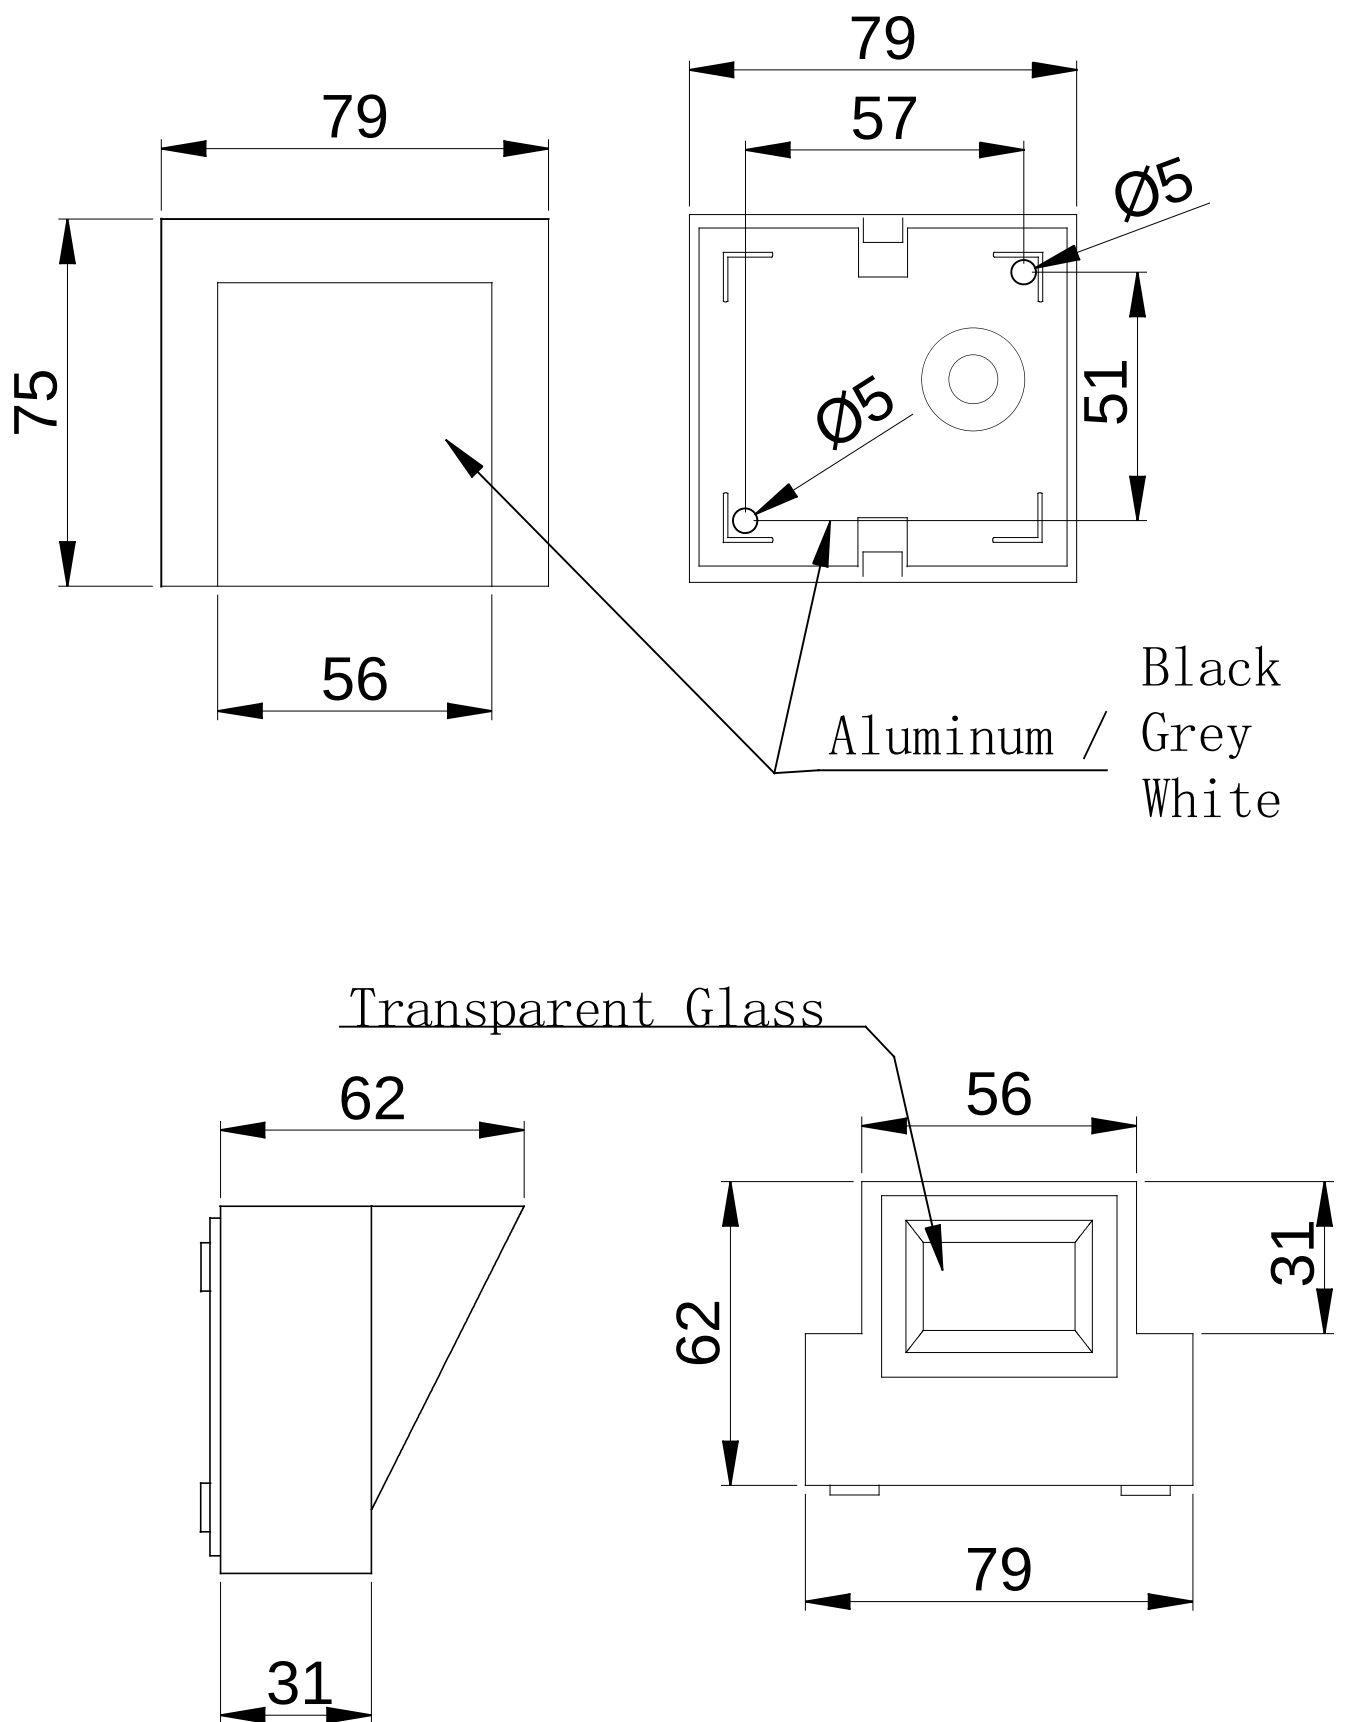


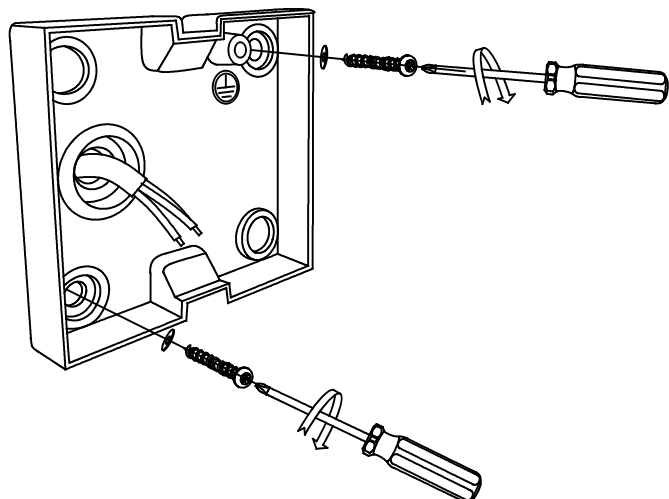


2

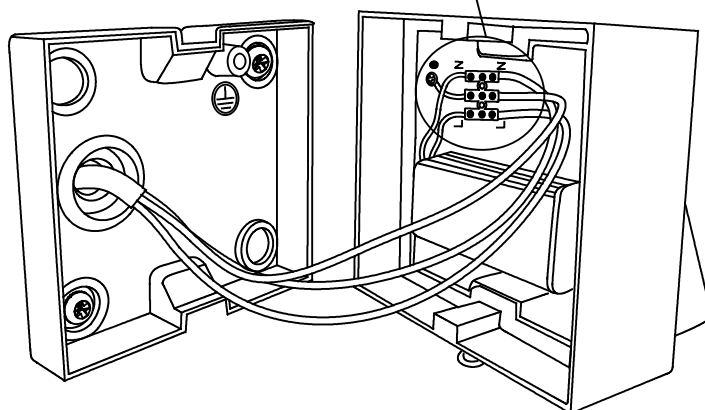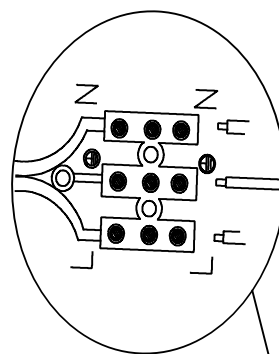

3

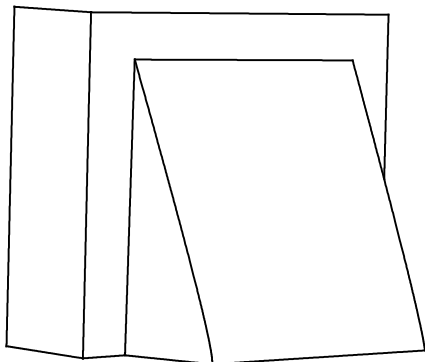

4

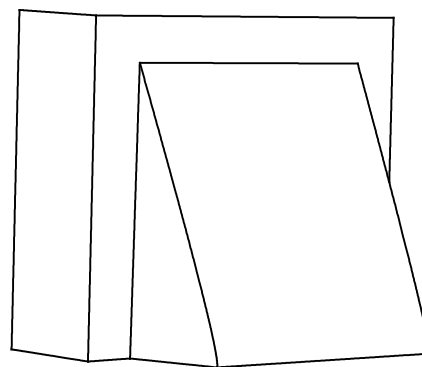

ON

